


Gliding Windows

	2'-0" (610)	2'-6" (762)	3'-0" (914)	3'-6" (1067)	4'-0" (1219)	4'-6" (1372)	5'-0" (1524)	5'-6" (1676)	6'-0" (1829)
Rough Opening	1'-11½" (597)	2'-5½" (749)	2'-11½" (902)	3'-5½" (1054)	3'-11½" (1207)	4'-5½" (1359)	4'-11½" (1511)	5'-5½" (1664)	5'-11½" (1816)
Unit Dimension	1'-0" (305)	1'-6" (457)	1'-5½" (445)	1'-5½" (445)	1'-5½" (445)	1'-5½" (445)	1'-5½" (445)	1'-5½" (445)	1'-5½" (445)
Gliding Windows - XO/OX (100GXO)									
2010	2610	3010	3610	4010	4610	5010	5610	6010	
2016	2616	3016	3616	4016	4616	5016	5616	6016	
2020	2620	3020	3620	4020	4620	5020	5620	6020	
2026	2626	3026	3626	4026	4626	5026	5626	6026	♦
2030	2630	3030	3630	4030	4630	5030	5630	6030	♦
2036	2636	3036	3636	4036	4636	5036	5636	6036	♦
2040	2640	3040	3640	4040	4640	5040	5640	6040	♦
2046	2646	3046	3646	4046	4646	5046	5646	6046	♦
2050	2650	3050	3650	4050	4650	5050	5650	6050	♦
2056	2656	3056	3656	4056	4656	5056	5656	6056	♦
2060	2660	3060	3660	4060	4660	5060	5660	6060	♦

Gliding Window Handing Options



Notes:

- *Window Dimension* always refers to outside frame to frame dimension.
- *Minimum Rough Opening* dimensions may need to be increased to allow for use of building wraps, flashing, sill panning, brackets, fasteners or other items.
- Dimensions in parentheses are in millimeters.
- ♦ Meet or exceed clear opening area of 5.7 sq. ft. or 0.53 m², clear opening width of 20" (508) and clear opening height of 24" (610).

Date: 07/08/16
Scale: 1/8" (3) = 1' (305)

Gliding Windows

		5'-0" (1524)	6'-0" (1829)	7'-0" (2134)	7'-6" (2286)	8'-0" (2438)	8'-6" (2591)
		4'-11½" (1511)	5'-11½" (1816)	6'-11½" (2121)	7'-5½" (2273)	7'-11½" (2426)	8'-5½" (2578)
Rough Opening	Unit Dimension	1'-6" (457)	2'-0" (610)	2'-6" (762)	3'-0" (914)	3'-6" (1067)	4'-0" (1219)
		1'-5½" (445)	1'-11½" (597)	2'-5½" (749)	2'-11½" (902)	3'-5½" (1054)	3'-11½" (1207)
		4'-0" (1219)	4'-6" (1372)	5'-0" (1524)	5'-6" (1676)	6'-0" (1829)	6'-6" (1982)
		3'-11½" (1207)	4'-5½" (1359)	4'-11½" (1511)	5'-5½" (1664)	5'-11½" (1816)	6'-5½" (1969)
Gliding Windows - XOX (100GXOX)							
		5016	6016	7016	7616	8016	8616
		5020	6020	7020	7620	8020	8620
		5026	6026	7026	7626	8026	8626
		5030	6030	7030	7630	8030	8630
		5036	6036	7036	7636	8036	8636
		5040	6040	7040	7640	8040	8640
		5046	6046	7046	7646	8046	8646
		5050	6050	7050	7650	8050	8650
		5056	6056	7056	7656	8056	8656
		5060	6060	7060	7660	8060	8660

Wider sizes continue on page 03

Notes:

- *Window Dimension* always refers to outside frame to frame dimension.
- *Minimum Rough Opening* dimensions may need to be increased to allow for use of building wraps, flashing, sill panning, brackets, fasteners or other items.
- Dimensions in parentheses are in millimeters.
- ◆ Meet or exceed clear opening area of 5.7 sq. ft. or 0.53 m², clear opening width of 20" (508) and clear opening height of 24" (610).

Date: 07/08/16
Scale: 1/8" (3) = 1' (305)

		9'-0" (2743)	10'-0" (3048)	11'-0" (3353)	12'-0" (3658)
		8'-11½" (2731)	9'-11½" (3035)	10'-11½" (3340)	11'-11½" (3645)
Rough Opening	Unit Dimension	Gliding Windows - XOX (100GXOX)			
		1'-6" (457)			
2'-0" (610)	1'-5½" (445)				
2'-6" (762)	2'-5" (749)				
3'-0" (914)	2'-11½" (902)				
3'-6" (1067)	3'-5½" (1054)				
4'-0" (1219)	3'-11½" (1207)				
4'-6" (1372)	4'-5½" (1359)				
5'-0" (1524)	4'-11½" (1511)				
5'-6" (1676)	5'-5½" (1664)				
6'-0" (1829)	5'-11½" (1816)				

Notes:

- "Window Dimension" always refers to outside frame to frame dimension.
- "Minimum Rough Opening" dimensions may need to be increased to allow for use of building wraps, flashing, sill panning, brackets, fasteners or other items. Dimensions in parentheses are in millimeters.
- ♦ Meet or exceed clear opening area of 5.7 sq. ft. or 0.53 m², clear opening width of 20" (508) and clear opening height of 24" (610).
- * Meet PG20, all other windows meet PG30.

Date: 07/08/16
Scale: 1/8" (3) = 1' (305)

Gliding Windows

	4'-0" (1219)	5'-0" (1524)	6'-0" (1829)	7'-0" (2134)	7'-6" (2286)	8'-0" (2438)
Rough Opening	3'-11½" (1207)	4'-11½" (1511)	5'-11½" (1816)	6'-11½" (2121)	7'-5½" (2273)	7'-11½" (2426)
Unit Dimension	1'-6" (457)	2'-0" (610)	2'-6" (762)	3'-0" (914)	3'-6" (1067)	4'-0" (1219)
	1'-5½" (445)	1'-11½" (697)	2'-5½" (749)	2'-11½" (902)	3'-5½" (1054)	3'-11½" (1207)
	4'-6" (1372)	4'-5½" (1359)	5'-0" (1524)	5'-6" (1676)	5'-5½" (1664)	6'-0" (1829)
	4'-11½" (1511)	5'-11½" (1816)	6'-6" (1981)	7'-0" (2134)	7'-6" (2286)	8'-0" (2438)
	4'-0" (1219)	5'-0" (1524)	6'-0" (1829)	7'-0" (2134)	7'-6" (2286)	8'-0" (2438)
	3'-0" (914)	4'-0" (1219)	5'-0" (1524)	6'-0" (1829)	7'-0" (2134)	8'-0" (2438)
	2'-6" (762)	3'-6" (1067)	4'-6" (1372)	5'-6" (1676)	6'-6" (1981)	7'-6" (2286)
	2'-0" (610)	3'-0" (914)	4'-0" (1219)	5'-0" (1524)	6'-0" (1829)	7'-0" (2134)
	1'-6" (457)	2'-6" (762)	3'-6" (1067)	4'-6" (1372)	5'-6" (1676)	6'-6" (1981)
	1'-5½" (445)	2'-5½" (749)	3'-5½" (1054)	4'-5½" (1359)	5'-5½" (1664)	6'-5½" (1969)
	1'-11½" (697)	2'-11½" (902)	3'-11½" (1207)	4'-11½" (1511)	5'-11½" (1816)	6'-11½" (2121)

Equal Sash Gliding Windows - XOX (100GXOX)

4016 E	5016 E	6016 E	7016 E	7616 E	8016 E
4020 E	5020 E	6020 E	7020 E	7620 E	8020 E
4026 E	5026 E	6026 E	7026 E	7626 E	8026 E
4030 E	5030 E	6030 E	7030 E	7630 E	8030 E
4036 E	5036 E	6036 E	7036 E	7636 E	8036 E
4040 E	5040 E	6040 E	7040 E	7640 E	8040 E
4046 E	5046 E	6046 E	7046 E	7646 E	8046 E
4050 E	5050 E	6050 E	7050 E	7650 E	8050 E
4056 E	5056 E	6056 E	7056 E	7656 E	8056 E
4060 E	5060 E	6060 E	7060 E	7660 E	8060 E

Wider sizes continue on page 05


Notes:

- "Window Dimension" always refers to outside frame to frame dimension.
- "Minimum Rough Opening" dimensions may need to be increased to allow for use of building wraps, flashing, sill panning, brackets, fasteners or other items.
- Dimensions in parentheses are in millimeters.
- ♦ Meet or exceed clear opening area of 5.7 sq. ft. or 0.53 m², clear opening width of 20" (508) and clear opening height of 24" (610).

Date: 07/08/16
Scale: 1/8" (3) = 1' (305)

100 Series

Gliding Windows


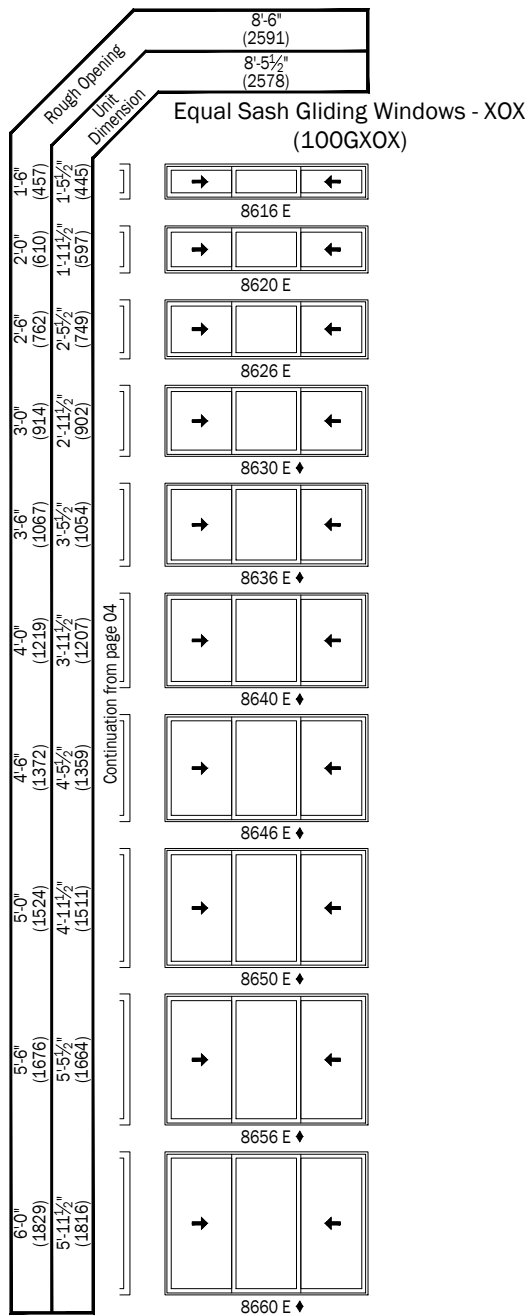


Notes:

"Window Dimension" always refers to outside frame to frame dimension.
 "Minimum Rough Opening" dimensions may need to be increased to allow for use of building wraps, flashing, sill panning, brackets, fasteners or other items.
 Dimensions in parentheses are in millimeters.
 ♦ Meet or exceed clear opening area of 5.7 sq. ft. or 0.53 m², clear opening width of 20" (508) and clear opening height of 24" (610).

Date: 07/08/16
 Scale: 1/8" (3) = 1' (305)

Picture Window over Gliding Windows

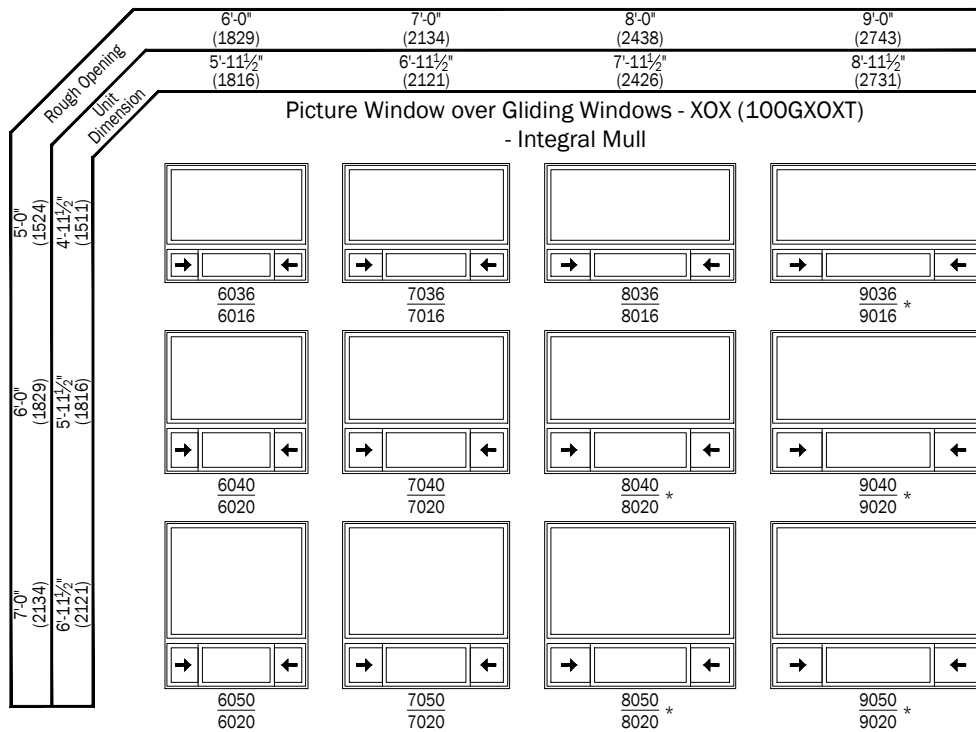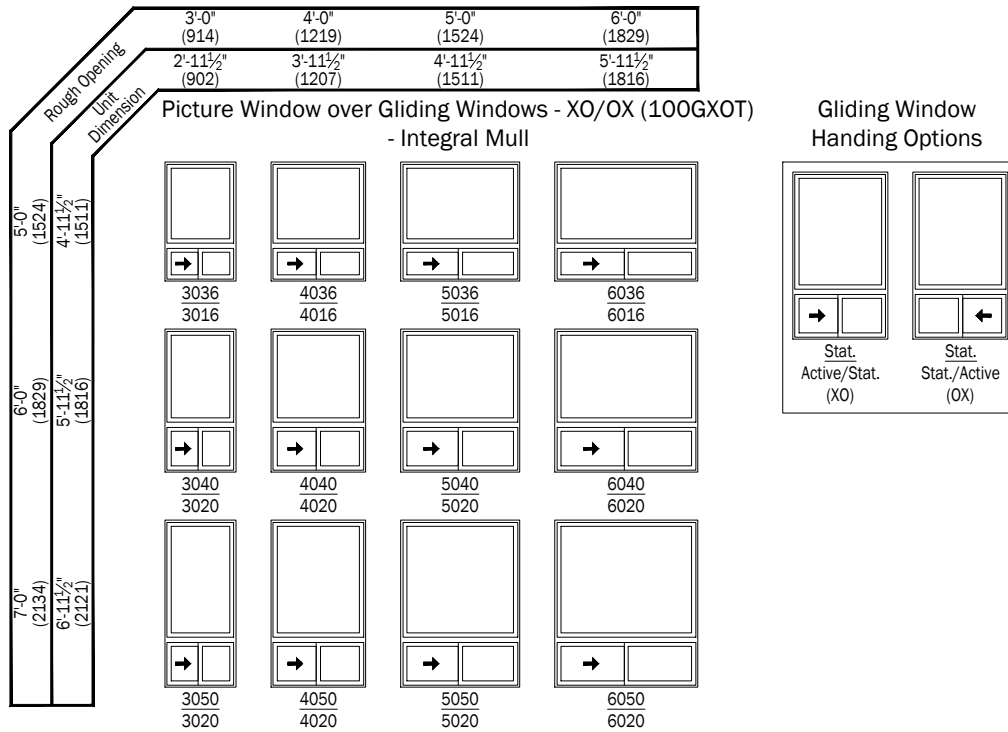

Notes:

"Window Dimension" always refers to outside frame to frame dimension.
 "Minimum Rough Opening" dimensions may need to be increased to allow for use of building wraps, flashing, sill panning, brackets, fasteners or other items.
 Dimensions in parentheses are in millimeters.
 * Meet PG20, all other windows meet PG30.

Date: 07/08/16
 Scale: 1/8" (3) = 1' (305)