

Picture and Single Transom Windows

	1'-0"	1'-6"	2'-0"	2'-6"	3'-0"	3'-6"	4'-0"	4'-6"	5'-0"	5'-6"
	(305)	(457)	(610)	(762)	(914)	(1067)	(1219)	(1372)	(1524)	(1676)
Rough Opening	1 1/2"	1'-5 1/2"	1'-11 1/2"	2'-5 1/2"	2'-11 1/2"	3'-5 1/2"	3'-11 1/2"	4'-5 1/2"	4'-11 1/2"	5'-5 1/2"
Unit Dimension	(292)	(445)	(597)	(749)	(902)	(1054)	(1207)	(1359)	(1511)	(1664)

Picture and Single Transom Windows (100REC)

1'-0"	1'-6"	2'-0"	2'-6"	3'-0"	3'-6"	4'-0"	4'-6"	5'-0"	5'-6"	
1010	1610	2010	2610	3010	3610	4010	4610	5010	5610	
1016	1616	2016	2616	3016	3616	4016	4616	5016	5616	
1020	1620	2020	2620	3020	3620	4020	4620	5020	5620	
1026	1626	2026	2626	3026	3626	4026	4626	5026	5626	
1030	1630	2030	2630	3030	3630	4030	4630	5030	5630	
1036	1636	2036	2636	3036	3636	4036	4636	5036	5636	
1040	1640	2040	2640	3040	3640	4040	4640	5040	5640	
1046	1646	2046	2646	3046	3646	4046	4646	5046	5646	
1050	1650	2050	2650	3050	3650	4050	4650	5050	5650	
1056	1656	2056	2656	3056	3656	4056	4656	5056	5656	
1060	1660	2060	2660	3060	3660	4060	4660	5060	5660	

Taller sizes continue on page 03

Wider sizes continue on page 02

Notes:

- "Window Dimension" always refers to outside frame to frame dimension.
- "Minimum Rough Opening" dimensions may need to be increased to allow for use of building wraps, flashing, sill panning, brackets, fasteners or other items.
- Dimensions in parentheses are in millimeters.

Date: 07/08/16
Scale: 1/8" (3) = 1' (305)

Picture and Single Transom Windows

	6'-0" (1829)	6'-6" (1981)	7'-0" (2134)	7'-6" (2286)	8'-0" (2438)
Rough Opening	5'-11½" (1816)	6'-5½" (1969)	6'-11½" (2121)	7'-5½" (2273)	7'-11½" (2426)
Unit Dimension	1'-0" (305)	1'-6" (457)	1'-5½" (445)	1'-11½" (357)	1'-11½" (357)

Unit Dimension	6'-0" (1829)	6'-6" (1981)	7'-0" (2134)	7'-6" (2286)	8'-0" (2438)
1'-0"	6010	6610	7010	7610	8010
1'-6"	6016	6616	7016	7616	8016
2'-0"	6020	6620	7020	7620	8020
2'-6"	6026	6626	7026	7626	8026
3'-0"	6030	6630	7030	7630	8030
3'-6"	6036	6636	7036	7636	8036
4'-0"	6040	6640	7040	7640	8040
4'-6"	6046	6646	7046	7646	8046
5'-0"	6050	6650	7050	7650	8050
5'-6"	6056	6656	7056	7656	8056
6'-0"	6060	6660	7060	7660	8060

Continuation from page 01

Taller sizes continue on page 04

Notes:

"Window Dimension" always refers to outside frame to frame dimension.
 "Minimum Rough Opening" dimensions may need to be increased to allow for use of building wraps, flashing, sill panning, brackets, fasteners or other items.
 Dimensions in parentheses are in millimeters.

Date: 07/08/16
 Scale: 1/8" (3) = 1' (305)

100 Series



Picture and Single Transom Windows

		1'-0"	1'-6"	2'-0"	2'-6"	3'-0"	3'-6"	4'-0"	4'-6"	5'-0"	5'-6"
		(305)	(457)	(610)	(762)	(914)	(1067)	(1219)	(1372)	(1524)	(1676)
Rough Opening	Unit Dimension	11½"	1'-5½"	1'-11½"	2'-5½"	2'-11½"	3'-5½"	3'-11½"	4'-5½"	4'-11½"	5'-5½"
		(292)	(445)	(597)	(749)	(902)	(1054)	(1207)	(1359)	(1511)	(1664)
Continuation from page 01											
6'-6"	(1981)	1066	1666	2066	2666	3066	3666	4066	4666	5066	5666
6'-5½"	(1969)										
7'-0"	(2134)	1070	1670	2070	2670	3070	3670	4070	4670	5070	5670
6'-11½"	(2121)										
7'-6"	(2286)	1076	1676	2076	2676	3076	3676	4076	4676	5076	5676
7'-5½"	(2273)										
8'-0"	(2438)	1080	1680	2080	2680	3080	3680	4080	4680	5080	5680
7'-11½"	(2426)										

Wider sizes continue on page 04


Notes:

"Window Dimension" always refers to outside frame to frame dimension.
 "Minimum Rough Opening" dimensions may need to be increased to allow for use of building wraps, flashing, sill panning, brackets, fasteners or other items.
 Dimensions in parentheses are in millimeters.

Date: 07/08/16
 Scale: 1/8" (3) = 1' (305)

100 Series

Picture and Single Transom Windows

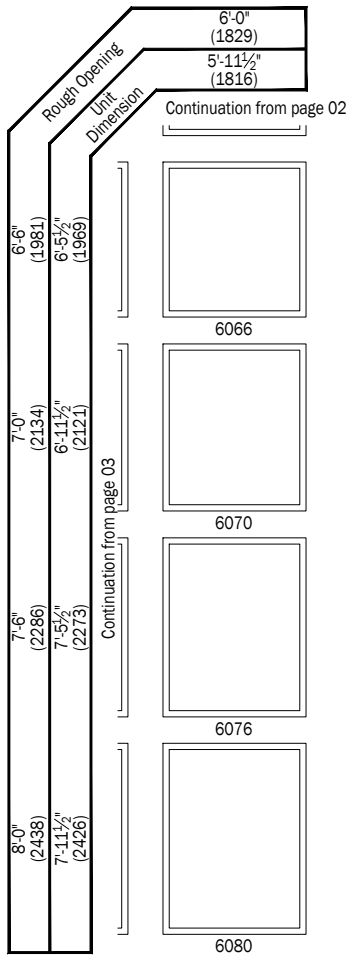

Notes:

"Window Dimension" always refers to outside frame to frame dimension.

"Minimum Rough Opening" dimensions may need to be increased to allow for use of building wraps, flashing, sill panning, brackets, fasteners or other items.

Dimensions in parentheses are in millimeters.


Date: 07/08/16

Scale: 1/8" (3) = 1' (305)

Specialty Windows Custom Sizing

Custom Unequal Leg Archtop

Choose left facing (1) or right facing (2) as viewed from the exterior.




Custom-size design limitations:

Min/Max Window Width: 17 1/2" (445) to 95 1/2" (2426)
 Min/Max Window Height: 11 3/8" (289) to 95 1/2" (2426)
 Min/Max Short Leg Height: 9 3/4" (248) to 93 7/8" (2384)
 Max Frame Area: 40 sq. ft. or 3.7m² (Based on the smallest square or rectangular shape that covers the entire window)
 Additional limitations may apply. Contact your Andersen supplier for more information.

Custom Trapezoid

Choose left facing (1) or right facing (2) as viewed from the exterior.




Custom-size design limitations:

Min/Max Window Width: 17 1/2" (445) to 107 1/2" (2731)
 Min/Max Window Height: 9 5/8" (251) to 95 1/2" (2426)
 Min/Max Short Leg Height: 9 3/4" (248) to 95 3/8" (2423)
 Max Frame Area: 40 sq. ft. or 3.7m² (Based on the smallest square or rectangular shape that covers the entire window)
 Additional limitations may apply. Contact your Andersen supplier for more information.

Custom Peak Pentagon


Custom-size design limitations:



Min/Max Window Width: 17 1/2" (445) to 107 1/2" (2731)
 Min/Max Window Height: 14 1/8" (359) to 107 1/2" (2731)
 Min/Max Short Leg Height: 9 3/4" (248) to 94 1/8" (2391)
 Max Frame Area: 40 sq. ft. or 3.7m² (Based on the smallest square or rectangular shape that covers the entire window)
 Additional limitations may apply. Contact your Andersen supplier for more information.

Custom Angled Pentagon

Choose left facing (1) or right facing (2) as viewed from the exterior.

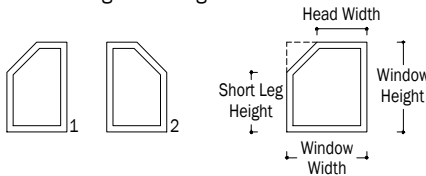


Custom-size design limitations:

Min/Max Window Width: 17 1/2" (445) to 107 1/2" (2731)
 Min/Max Window Height: 14 3/8" (365) to 107 3/8" (2727)
 Min/Max Short Leg Height: 9 3/4" (248) to 94 1/8" (2391)
 Max Frame Area: 40 sq. ft. or 3.7m² (Based on the smallest square or rectangular shape that covers the entire window)
 Additional limitations may apply. Contact your Andersen supplier for more information.

Custom Octagon


Custom-size design limitations:

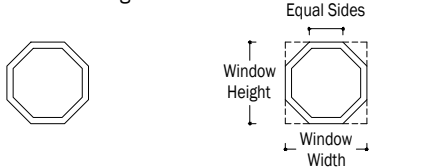

Min/Max Window Width: 23 1/2" (597) to 71 1/2" (1816)
 Min/Max Window Height: 23 1/2" (597) to 71 1/2" (1816)
 Additional limitations may apply. Contact your Andersen supplier for more information.

Custom Right Triangle

Choose left facing (1) or right facing (2) as viewed from the exterior.




Custom-size design limitations:

Min/Max Window Width: 17 1/2" (445) to 95 1/2" (2426)
 Min/Max Window Height: 17 1/2" (445) to 95 1/2" (2426)
 Max Frame Area: 40 sq. ft. or 3.7m² (Based on the smallest square or rectangular shape that covers the entire window)
 Additional limitations may apply. Contact your Andersen supplier for more information.

Custom Isosceles Triangle

Custom-size design limitations:







Min/Max Window Width: 17 1/2" (445) to 107 1/2" (2731)
 Min/Max Window Height: 17 1/2" (445) to 75 7/8" (1927)
 Max Frame Area: 40 sq. ft. or 3.7m² (Based on the smallest square or rectangular shape that covers the entire window)
 Additional limitations may apply. Contact your Andersen supplier for more information.

Notes:

Dimensions in parentheses are in millimeters.

Specialty Windows

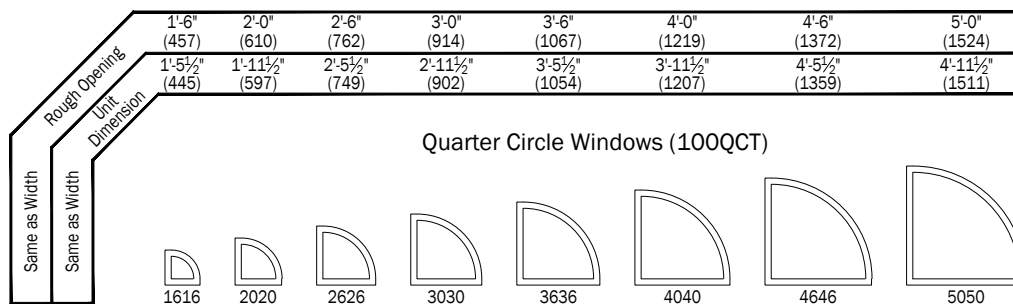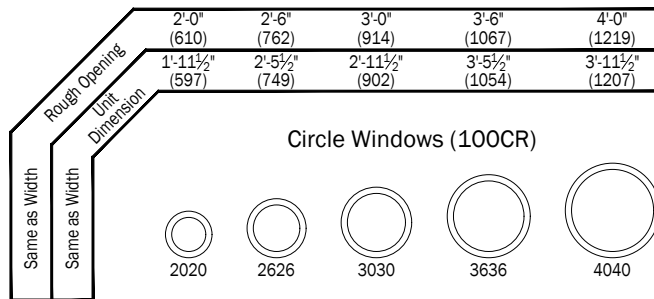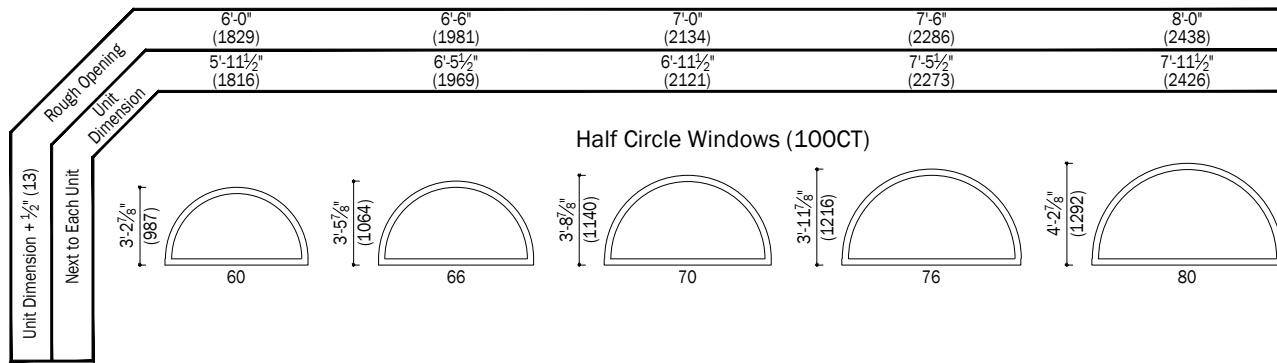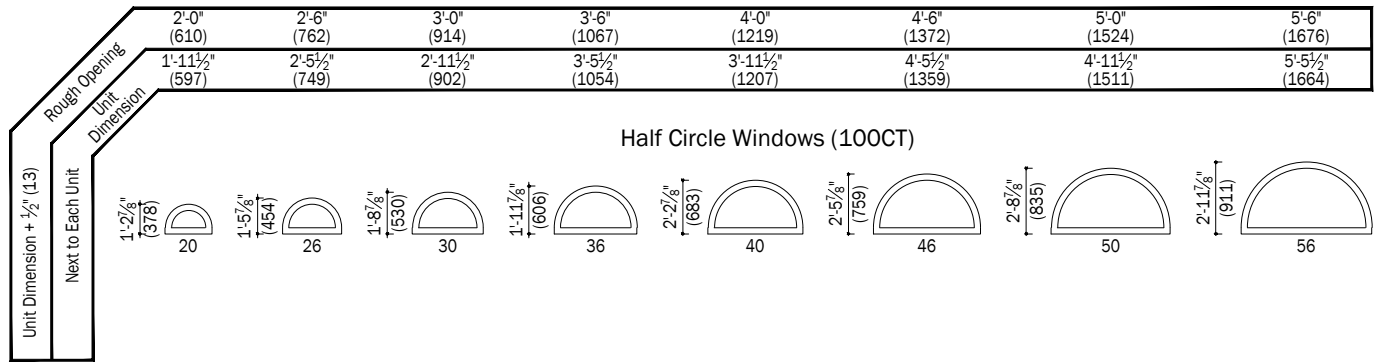


Notes:

"Window Dimension" always refers to outside frame to frame dimension.
 "Minimum Rough Opening" dimensions may need to be increased to allow for use of building wraps, flashing, sill panning, brackets, fasteners or other items.
 Dimensions in parentheses are in millimeters.

Date: 07/08/16
 Scale: 1/8" (3) = 1' (305)


Specialty Springline Windows

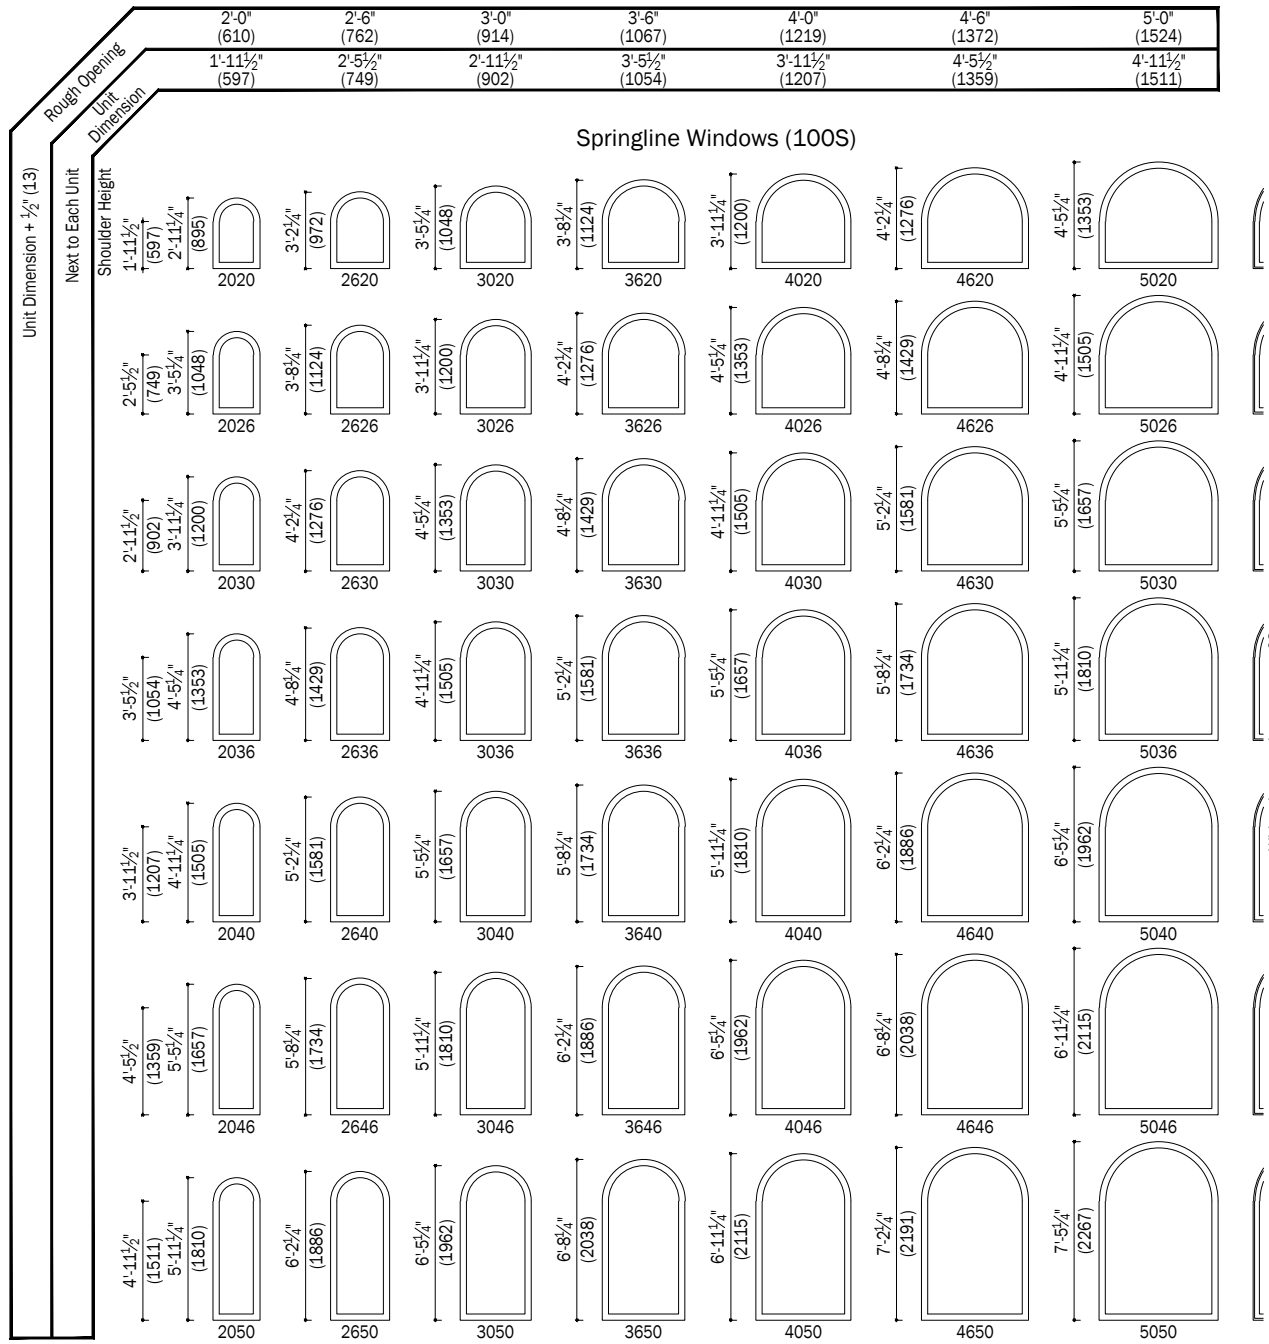

Notes:

"Window Dimension" always refers to outside frame to frame dimension.
 "Minimum Rough Opening" dimensions may need to be increased to allow for use of building wraps, flashing, sill panning, brackets, fasteners or other items.
 Dimensions in parentheses are in millimeters.

Date: 07/08/16
 Scale: 1/8" (3) = 1' (305)

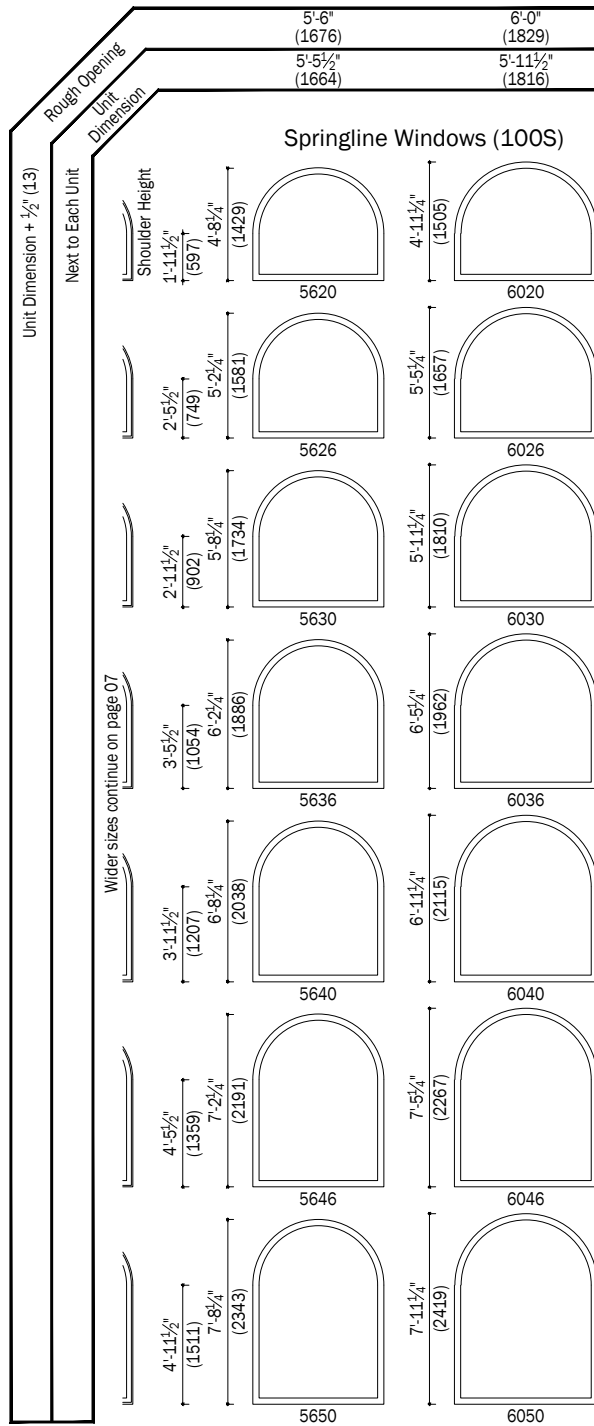

Notes:

"Window Dimension" always refers to outside frame to frame dimension.
 "Minimum Rough Opening" dimensions may need to be increased to allow for use of building wraps, flashing, sill panning, brackets, fasteners or other items.
 Dimensions in parentheses are in millimeters.

Date: 07/08/16
 Scale: 1/8" (3) = 1' (305)

All Equal Leg Arch windows have a radius equal to the unit's width.

	2'-0" (610)	2'-6" (762)	3'-0" (914)	3'-6" (1067)	4'-0" (1219)	4'-6" (1372)	5'-0" (1524)	5'-6" (1676)
Rough Opening	1'-11½" (597)	2'-5½" (749)	2'-11½" (902)	3'-5½" (1054)	3'-11½" (1207)	4'-5½" (1359)	4'-11½" (1511)	5'-5½" (1664)
Unit Dimension								

Arch Windows (100A)

Unit Dimension + ½" (13)	Next to Each Unit	Shoulder Height	1'-5½" (445)	1'-9/16" (545)	1'-10/4" (565)	1'-11/16" (586)	1'-5/8" (606)	1'-6¼/32" (627)	1'-7½/32" (647)	1'-8½/32" (667)	1'-9/32" (687)		
			1'-11½" (597)	2'-3/16" (697)	2'-4½" (718)	2'-5½/16" (738)	2'-5/8" (759)	2'-6¼/32" (779)	2'-7½/32" (799)	2'-8½/32" (820)	2'-9/32" (840)	2'-9½/32" (860)	
			2'-5/8" (749)	2'-9/16" (850)	2'-10/4" (870)	2'-11½/16" (891)	2'-11/8" (911)	3'-0¼/32" (931)	3'-1½/32" (952)	3'-2½/32" (972)	3'-3½/32" (992)	3'-4½/32" (1012)	3'-5½/32" (1032)
			2'-11½" (902)	3'-3/16" (1002)	3'-4½" (1023)	3'-5½/16" (1043)	3'-5/8" (1063)	3'-6¼/32" (1084)	3'-7½/32" (1104)	3'-8½/32" (1125)	3'-9½/32" (1145)	3'-10½/32" (1165)	3'-11½/32" (1185)
			3'-5/8" (1054)	3'-9/16" (1154)	3'-10/4" (1175)	3'-11½/16" (1195)	3'-11/8" (1216)	4'-0¼/32" (1236)	4'-1½/32" (1257)	4'-2½/32" (1277)	4'-3½/32" (1297)	4'-4½/32" (1317)	4'-5½/32" (1337)
			3'-11½" (1207)	4'-3/16" (1307)	4'-4½" (1327)	4'-5½/16" (1348)	4'-5/8" (1368)	4'-6¼/32" (1389)	4'-7½/32" (1409)	4'-8½/32" (1429)	4'-9½/32" (1449)	4'-10½/32" (1469)	4'-11½/32" (1489)
			4'-5/8" (1359)	4'-9/16" (1459)	4'-10/4" (1480)	4'-11½/16" (1500)	4'-11/8" (1521)	5'-0¼/32" (1541)	5'-1½/32" (1561)	5'-2½/32" (1582)	5'-3½/32" (1602)	5'-4½/32" (1622)	5'-5½/32" (1642)
			4'-11½" (1511)	5'-3/16" (1612)	5'-4½" (1632)	5'-5½/16" (1653)	5'-5/8" (1673)	5'-6¼/32" (1693)	5'-7½/32" (1714)	5'-8½/32" (1734)	5'-9½/32" (1754)	5'-10½/32" (1774)	5'-11½/32" (1794)
			5'-5/8" (1664)	5'-9/16" (1764)	5'-10/4" (1785)	5'-11½/16" (1805)	5'-11/8" (1825)	6'-0¼/32" (1846)	6'-1½/32" (1866)	6'-2½/32" (1887)	6'-3½/32" (1907)	6'-4½/32" (1927)	6'-5½/32" (1947)
			5'-11½" (1816)	6'-3/16" (1916)	6'-4½" (1937)	6'-5½/16" (1957)	6'-5/8" (1978)	6'-6¼/32" (1998)	6'-7½/32" (2019)	6'-8½/32" (2039)	6'-9½/32" (2059)	6'-10½/32" (2079)	6'-11½/32" (2099)
2010	2016	2020	2026	2030	2036	2040	2046	2050	2056	2060			
2610	2616	2620	2626	2630	2636	2640	2646	2650	2656	2660			
3010	3016	3020	3026	3030	3036	3040	3046	3050	3056	3060			
3610	3616	3620	3626	3630	3636	3640	3646	3650	3656	3660			
4010	4016	4020	4026	4030	4036	4040	4046	4050	4056	4060			
4610	4616	4620	4626	4630	4636	4640	4646	4650	4656	4660			
5010	5016	5020	5026	5030	5036	5040	5046	5050	5056	5060			
5610	5616	5620	5626	5630	5636	5640	5646	5650	5656	5660			

Wider sizes continue on page 10

Notes:

"Window Dimension" always refers to outside frame to frame dimension.
 "Minimum Rough Opening" dimensions may need to be increased to allow for use of building wraps, flashing, sill panning, brackets, fasteners or other items.
 Dimensions in parentheses are in millimeters.

Date: 07/08/16
 Scale: 1/8" (3) = 1' (305)

Specialty Arch Windows

All Equal Leg Arch windows have a radius equal to the unit's width.

6'-0" (1829)	6'-6" (1981)	7'-0" (2134)	7'-6" (2286)	8'-0" (2438)
5'-11½" (1816)	6'-5½" (1969)	6'-11½" (2121)	7'-5½" (2273)	7'-11½" (2426)

Arch Windows (100A)

Unit Dimension + ½" (13)

Rough Opening

Unit Dimension

Next to Each Unit

Shoulder Height

Wider sizes continue on page 09

6010	6610	7010	7610	8010
6016	6616	7016	7616	8016
6020	6620	7020	7620	8020
6026	6626	7026	7626	8026
6030	6630	7030	7630	8030
6036	6636	7036	7636	8036
6040	6640	7040	7640	8040
6046	6646	7046	7646	8046
6050	6650	7050	7650	8050
6056	6656	7056	7656	8056
6060	6660	7060	7660	8060

Notes:

"Window Dimension" always refers to outside frame to frame dimension.
 "Minimum Rough Opening" dimensions may need to be increased to allow for use of building wraps, flashing, sill panning, brackets, fasteners or other items.
 Dimensions in parentheses are in millimeters.

Date: 07/08/16
 Scale: 1/8" (3) = 1' (305)