

FRENCHWOOD® HINGED INSWING PATIO DOORS

Table of Frenchwood® Hinged Inswing Patio Door Sizes

Scale 1/8" (3) = 1'-0" (305) – 1:96

Door Dimension	2'-0 1/2" (620)			4'-0" (1219)		4'-0" (1219)		
Minimum Rough Opening	2'-1" (634)			4'-1" (1242)		4'-1" (1242)		
Unobstructed Glass (single panel only)	13 1/4" (336)			13 1/4" (336)		13 1/4" (336)		
3 heights								
	<ol style="list-style-type: none"> FWH2168S FWH21611S FWH2180S 			<ol style="list-style-type: none"> FWH4168APLR FWH41611APLR FWH4180APLR 		<ol style="list-style-type: none"> FWH4168PALR FWH41611PALR FWH4180PALR 		
Door Dimension	2'-6 1/8" (765)	2'-6 1/8" (765)	2'-6 1/8" (765)	4'-11 1/4" (1504)	4'-11 1/4" (1504)	4'-11 1/4" (1504)	4'-11 1/4" (1504)	4'-11 1/4" (1504)
Minimum Rough Opening	2'-7" (787)	2'-7" (787)	2'-7" (787)	5'-0" (1524)	5'-0" (1524)	5'-0" (1524)	5'-0" (1524)	5'-0" (1524)
Unobstructed Glass (single panel only)	18 7/8" (479)	18 7/8" (479)	18 7/8" (479)	18 7/8" (479)	18 7/8" (479)	18 7/8" (479)	18 7/8" (479)	18 7/8" (479)
3 heights								
	<ol style="list-style-type: none"> FWH2768S FWH27611S FWH2780S 	<ol style="list-style-type: none"> FWH2768AR FWH27611AR FWH2780AR 	<ol style="list-style-type: none"> FWH2768AL FWH27611AL FWH2780AL 	<ol style="list-style-type: none"> FWH5068SS FWH50611SS FWH5080SS 	<ol style="list-style-type: none"> FWH5068ASR FWH50611ASR FWH5080ASR 	<ol style="list-style-type: none"> FWH5068SAL FWH50611SAL FWH5080SAL 	<ol style="list-style-type: none"> FWH5068APLR FWH50611APLR FWH5080APLR 	<ol style="list-style-type: none"> FWH5068PALR FWH50611PALR FWH5080PALR
Door Dimension	2'-8 1/8" (816)	2'-8 1/8" (816)	2'-8 1/8" (816)	5'-3 1/4" (1607)	5'-3 1/4" (1607)	5'-3 1/4" (1607)	5'-3 1/4" (1607)	5'-3 1/4" (1607)
Minimum Rough Opening	2'-9" (838)	2'-9" (838)	2'-9" (838)	5'-4" (1626)	5'-4" (1626)	5'-4" (1626)	5'-4" (1626)	5'-4" (1626)
Unobstructed Glass (single panel only)	20 7/8" (530)	20 7/8" (530)	20 7/8" (530)	20 7/8" (530)	20 7/8" (530)	20 7/8" (530)	20 7/8" (530)	20 7/8" (530)
3 heights								
	<ol style="list-style-type: none"> FWH2968S FWH29611S FWH2980S 	<ol style="list-style-type: none"> FWH2968AR FWH29611AR FWH2980AR 	<ol style="list-style-type: none"> FWH2968AL FWH29611AL FWH2980AL 	<ol style="list-style-type: none"> FWH5468SS FWH54611SS FWH5480SS 	<ol style="list-style-type: none"> FWH5468ASR FWH54611ASR FWH5480ASR 	<ol style="list-style-type: none"> FWH5468SAL FWH54611SAL FWH5480SAL 	<ol style="list-style-type: none"> FWH5468APLR FWH54611APLR FWH5480APLR 	<ol style="list-style-type: none"> FWH5468PALR FWH54611PALR FWH5480PALR
Door Dimension	3'-0 1/8" (918)	3'-0 1/8" (918)	3'-0 1/8" (918)	5'-11 1/4" (1810)	5'-11 1/4" (1810)	5'-11 1/4" (1810)	5'-11 1/4" (1810)	5'-11 1/4" (1810)
Minimum Rough Opening	3'-1" (940)	3'-1" (940)	3'-1" (940)	6'-0" (1829)	6'-0" (1829)	6'-0" (1829)	6'-0" (1829)	6'-0" (1829)
Unobstructed Glass (single panel only)	24 7/8" (632)	24 7/8" (632)	24 7/8" (632)	24 7/8" (632)	24 7/8" (632)	24 7/8" (632)	24 7/8" (632)	24 7/8" (632)
3 heights								
	<ol style="list-style-type: none"> FWH3168S FWH31611S FWH3180S 	<ol style="list-style-type: none"> FWH3168AR FWH31611AR FWH3180AR 	<ol style="list-style-type: none"> FWH3168AL FWH31611AL FWH3180AL 	<ol style="list-style-type: none"> FWH6068SS FWH60611SS FWH6080SS 	<ol style="list-style-type: none"> FWH6068ASR FWH60611ASR FWH6080ASR 	<ol style="list-style-type: none"> FWH6068SAL FWH60611SAL FWH6080SAL 	<ol style="list-style-type: none"> FWH6068APLR FWH60611APLR FWH6080APLR 	<ol style="list-style-type: none"> FWH6068PALR FWH60611PALR FWH6080PALR




Custom-size doors are available in 1/8" (3) increments between the smallest and largest standard door sizes. **Measurement guide** can be found at andersenwindows.com/measure. Some restrictions apply. Contact your Andersen supplier for availability.

Stationary (S) doors can be used as an individual unit or as a sidelight.






• "Door Dimension" always refers to outside frame to frame dimension.
 • "Minimum Rough Opening" dimensions may need to be increased to allow for use of building wraps, flashing, sill panning, brackets, fasteners or other items.
 • Dimensions in parentheses are in millimeters.

Three Patio Door Heights

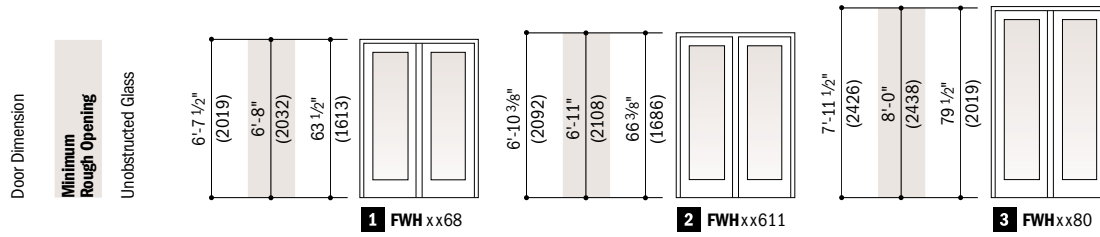

Order Designation Description

Viewed from the exterior.

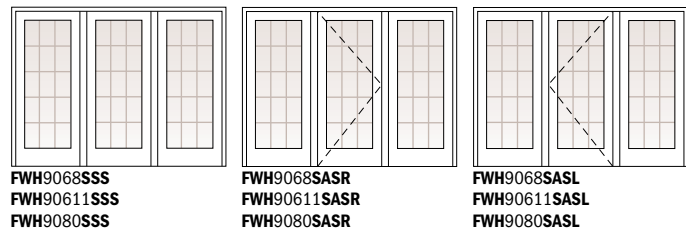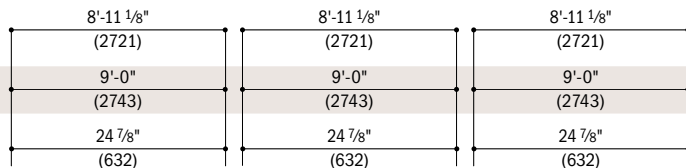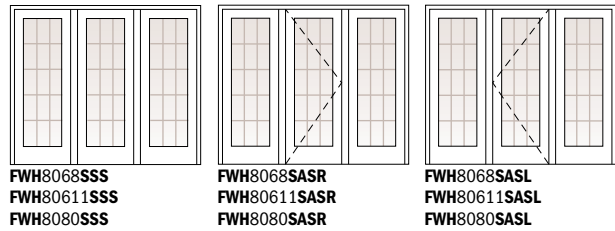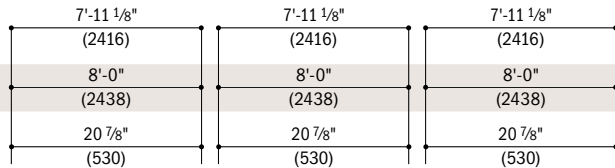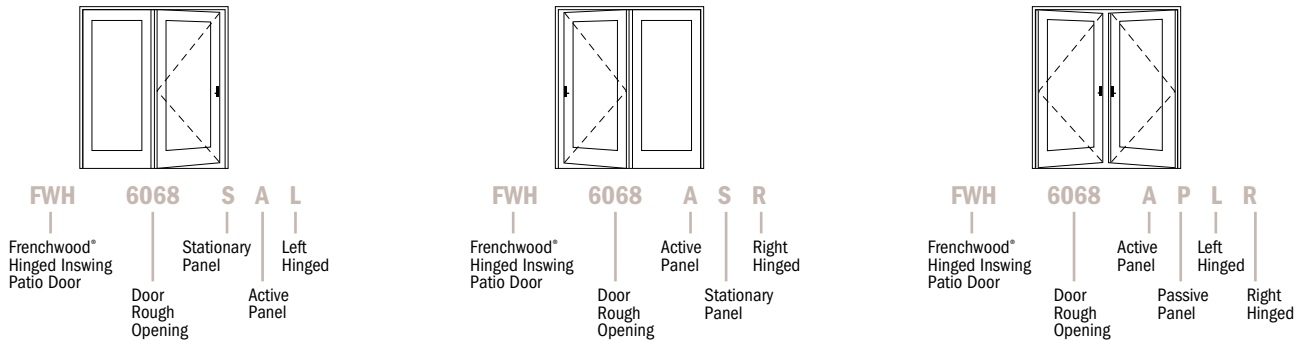

• "Door Dimension" always refers to outside frame to frame dimension.
• "Minimum Rough Opening" dimensions may need to be increased to allow for use of building wraps, flashing, sill panning, brackets, fasteners or other items.
• Dimensions in parentheses are in millimeters.