


# **Gliding Patio Door Panel Labeling**

#### **Door Panel Options**

Andersen\* E-Series offers both contemporary and French panel styles to complement traditional or modern architecture.



SP1
SP2

411/16" stiles, 411/16" top rail
& 8" bottom rail
& 12" bottom rail

# **Gliding Patio Door Handing**


The door handing and order designation noted below is consistent with the handing of other Andersen\* gliding patio doors and is used throughout the remainder of the gliding patio doors section.

#### Identification

**As viewed from the exterior,** either the left or the right panel operates. The arrow designates the direction of panel operation. Stationary (S) doors can be used as an individual unit or as a sidelight.

# **Gliding Patio Doors & French Gliding Patio Doors**


#### **Handing Options**

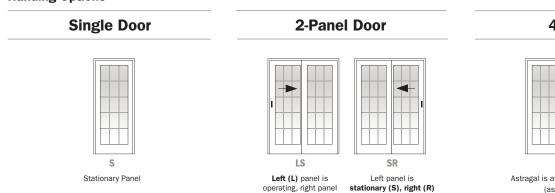

is stationary (S).

Order Designation Description	
	As Viewed From Exterior
Stationary	S
2-Panel Door	SR
	LS
4-Panel Door	_

#### **4-Panel Door**




Astragal is attached on third panel from the left (as viewed from the exterior)


# **E-SERIES** GLIDING PATIO DOORS



# **Gliding Patio Door Sizes**

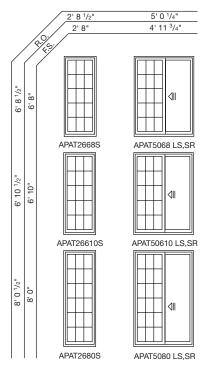

#### **Gliding Patio Door Sizes**

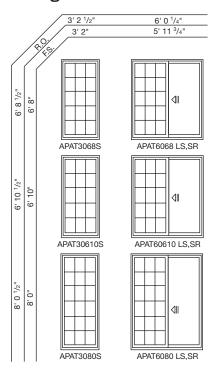

#### NOTES

All doors and sidelights use safety/ tempered glass.

Astragal is applied to third panel from the left (as viewed from the exterior) on a 4-panel gliding patio door.

\*\*4-panel doors are shipped knocked down and require field assembly because of size and weight.

Use structural joining material when necessary or required by code.

The light patterns illustrated apply to removable interior wood grilles, Full Divided Light, Simulated Divided Light, Decorelle 100, 150 and 400 and Finelight\* Grilles-Between-the-Glass. All removable interior wood grilles will be installed in the units unless otherwise specified.


For a metric conversion in millimeters, multiply dimensions in inches by 25.4.

#### FORMULA FOR COMBINATION DOORS


The overall frame dimension (both width and height) is equal to the sum of the individual unit frame dimensions plus joining material dimension(s).

The overall rough opening (both width and height) is equal to the overall frame dimensions plus 1/4" on all sides.

#### **Gliding Patio Door Sizes**

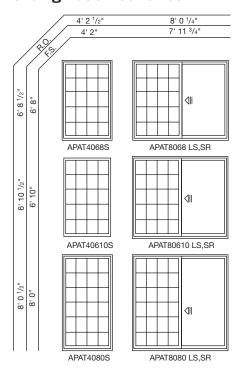


## **4-Panel Gliding Patio Door Sizes**

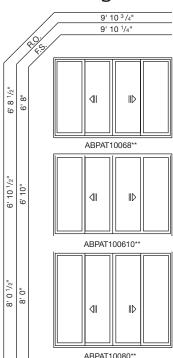





#### **4-Panel Gliding Patio Door Sizes**

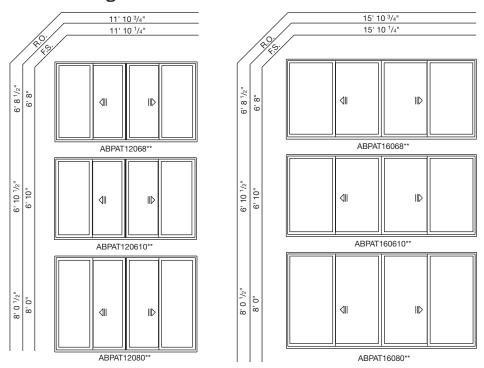

## **Gliding Patio Door Direct-Set Elliptical Sizes (Specialty Frame)**



#### **Gliding Patio Door Direct-Set Transom Sizes (Specialty Frame)**



#### NOTES

All doors and sidelights use safety/tempered glass.

If glass is positioned within 18" of the finished floor, safety/tempered glass may be required. Local codes may differ. Verify tempered glass requirements with your local building code official.

Astragal is applied to third panel from the left (as viewed from the exterior) on a 4-panel gliding patio door.

\*\*4-panel doors are shipped knocked down and require field assembly because of size and weight.

See transom notes on page 4.

Use structural joining material when necessary or required by code.

The light patterns illustrated apply to removable interior wood grilles, Full Divided Light, Simulated Divided Light, Decorelle 100, 150 and 400 and Finelight™ Grilles-Between-the-Glass. All removable interior wood grilles will be installed in the units unless otherwise specified. The staggered light patterns illustrated align with light patterns for the gliding door. Other light patterns are available upon request.

For a metric conversion in millimeters, multiply dimensions in inches by 25.4.

#### FORMULA FOR COMBINATION DOORS

The overall frame dimension (both width and height) is equal to the sum of the individual unit frame dimensions plus joining material dimension(s).


The overall rough opening (both width and height) is equal to the overall frame dimensions plus 1/4" on all sides.


FOR WINDOWS GREATER THAN 30 SQUARE FEET OR RATED HIGHER THAN PG50, ONE OF THESE THREE INSTALLATION METHODS IS REQUIRED:
A) THROUGH THE JAMB B) ALUMINUM INSTALLATION FLANGE OR C) INSTALLATION CLIPS.
ADDITIONAL CUSTOM SIZES ARE AVAILABLE. CONTACT YOUR LOCAL SUPPLIER FOR MORE INFORMATION. DRAWINGS ARE NOT TO SCALE.


2020 E-Series Product Guide





# **Gliding Patio Door Direct-Set Half Circle Sizes (Specialty Frame)**











#### NOTES

4'11-3/4" wide units are used above 5068, 50610 or 5080 Gliding Patio Doors.

5'11-3/4" wide units are used above 6068, 60610 or 6080 Gliding Patio Doors.

7'7-3/4" wide units are used above 7668, 76610 or 7680 Gliding Patio Doors.


7'11-3/4" wide units are used above 8068, 80610 or 8080 Gliding Patio Doors.

9'1-3/4" wide units are used above 9068, 90610 or 9080 Gliding Patio Doors.

See notes on page 3 for more information.



# **French Gliding Patio Door Sizes**

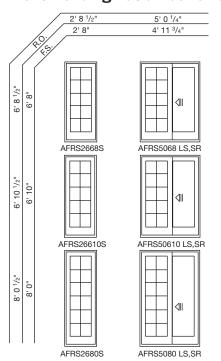

#### NOTES

All doors and sidelights use safety/ tempered glass.

Use structural joining material when necessary or required by code.


The light patterns illustrated apply to removable interior wood grilles, Full Divided Light, Simulated Divided Light, Decorelle 100, 150 and 400 and Finelight™ Grilles-Between-the-Glass. All removable interior wood grilles will be installed in the units unless otherwise specified.

For a metric conversion in millimeters, multiply dimensions in inches by 25.4.

FORMULA FOR COMBINATION DOORS
The overall frame dimension (both width and height) is equal to the sum of the individual unit frame dimensions plus joining material dimension(s).

The overall rough opening (both width and height) is equal to the overall frame dimensions plus 1/4" on all sides.


# **French Gliding Patio Door Sizes**

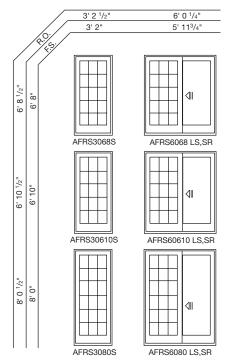


# **E-SERIES** GLIDING PATIO DOORS



# **French Gliding Patio Door Sizes**

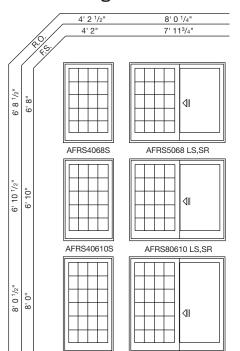


# **4-Panel French Gliding Patio Door Sizes**

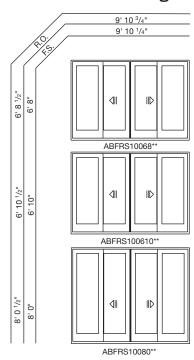

# **4-Panel French Gliding Patio Door Sizes**

AFRS8080 LS,SR

AFRS4080S

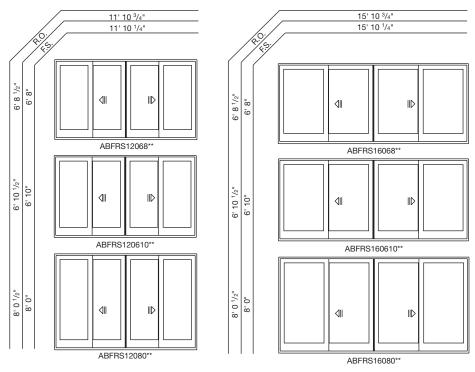

#### NOTES

All doors and sidelights use safety/tempered glass.


Astragal is applied to third panel from the left (as viewed from the exterior) on a 4-panel French gliding patio door.

\*\* 4-panel doors are shipped knocked down and require field assembly because of size and weight.


See notes on page 7 for more information.




#### French Gliding Patio Door Direct-Set Transom Sizes (Specialty Frame)



#### French Gliding Patio Door Direct-Set Elliptical Sizes (Specialty Frame)

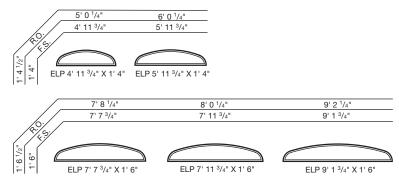

#### French Gliding Patio Door Direct-Set Half Circle Sizes (Specialty Frame)

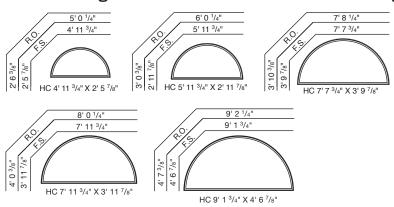

#### NOTES

All doors and sidelights use safety/tempered glass.

If glass is positioned within 18" of the finished floor, safety/tempered glass may be required. Local codes may differ. Verify tempered glass requirements with your local building code official.

 $4'\,11\text{-}3/4"$  wide units are used above 5068, 50610 or 5080 French Gliding Patio Doors.

 $5'11\mbox{-}3/4"$  wide units are used above 6068, 60610 or 6080 French Gliding Patio Doors.

7'7-3/4" wide units are used above 7668, 76610 or 7680 French Gliding Patio Doors.

7'11-3/4" wide units are used above 8068, 80610 or 8080 French Gliding Patio Doors.

9'1-3/4" wide units are used above 9068, 90610 or 9080 French Gliding Patio Doors.

Use structural joining material when necessary or required by code.

The light patterns illustrated apply to removable interior wood grilles, Full Divided Light, Simulated Divided Light, Decorelle 100, 150 and 400 and Finelight™ Grilles-Between-the-Glass. All removable interior wood grilles will be installed in the units unless otherwise specified. The staggered light patterns illustrated align with light patterns in the gliding door. Other light patterns are available upon request.

For a metric conversion in millimeters, multiply dimensions in inches by 25.4.

#### FORMULA FOR COMBINATION DOORS

The overall frame dimension (both width and height) is equal to the sum of the individual unit frame dimensions plus joining material dimension(s).

The overall rough opening (both width and height) is equal to the overall frame dimensions plus 1/4" on all sides.

FOR WINDOWS GREATER THAN 30 SQUARE FEET OR RATED HIGHER THAN PG50, ONE OF THESE THREE INSTALLATION METHODS IS REQUIRED:
A) THROUGH THE JAMB B) ALUMINUM INSTALLATION FLANGE OR C) INSTALLATION CLIPS.
ADDITIONAL CUSTOM SIZES ARE AVAILABLE. CONTACT YOUR LOCAL SUPPLIER FOR MORE INFORMATION. DRAWINGS ARE NOT TO SCALE.

2020 E-Series Product Guide