



Andersen® E-Series 2-Sash Gliding Window Sizes

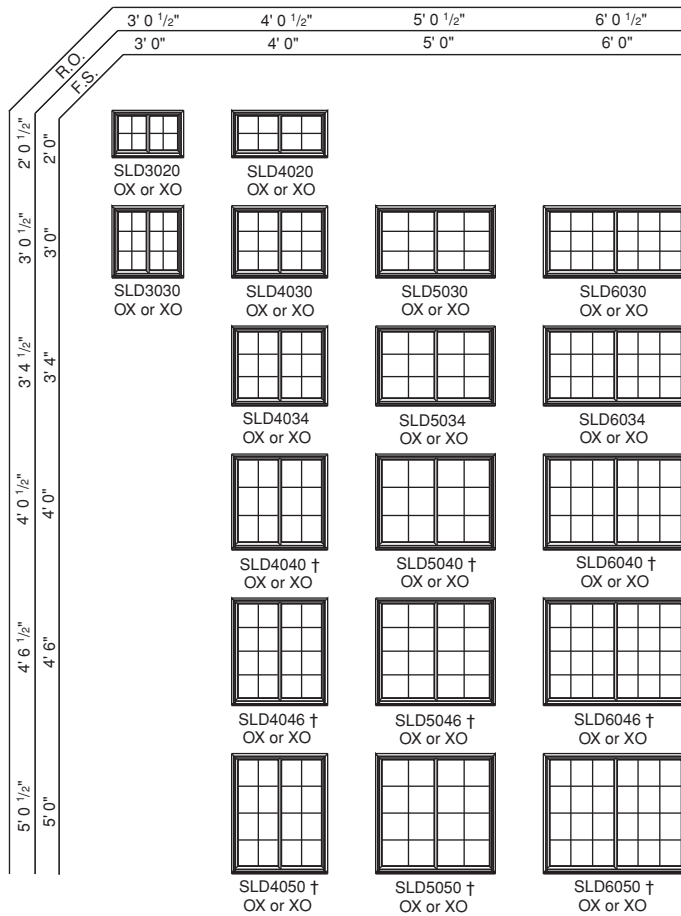

Andersen® E-Series 3-Sash Gliding Window Sizes

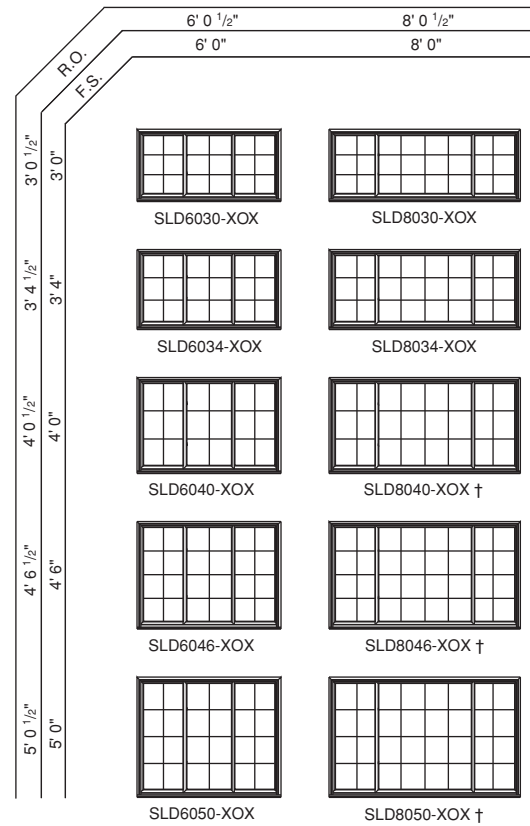

As viewed
from exterior

OX

XO

XOX

O = Fixed
X = Operable

NOTES

† These units meet or exceed the following dimensions: Clear Opening Area 5.7 sq. ft., Clear Opening Width 20", Clear Opening Height 24" and 44" maximum floor to sill height (with standard 6'10-1/2" structural header height). See your local code official for requirements in your area.

3-sash slide-by units use 2'0" operating sash as a standard. Additional sash ratios also available.

If glass is positioned within 18" of the finished floor, safety/tempered glass may be required. Local codes may differ. Verify tempered glass requirements with your local building code official.

Use structural mullions when necessary or required by code.

The light patterns illustrated apply to rectangular removable wood grilles, Modern Divided Lights, Classic Divided Lights, Deco 100, 150 and 400 and between-glass grilles. All removable wood grilles will be installed in the units unless otherwise specified.

For a metric conversion in millimeters, multiply dimensions in inches by 25.4.