

Andersen® E-Series Double-Hung Picture Window Sizes

		3' 0 1/2"	3' 2 1/2"	3' 4 1/2"	4' 0 1/2"	5' 0 1/2"
		3' 0"	3' 2"	3' 4"	4' 0"	5' 0"
R.O. F.S.	4' 0 1/2"					
	4' 0"	DHP3040	DHP3240	DHP3440	DHP4040	DHP5040
	4' 6 1/2"					
	4' 6"	DHP3046	DHP3246	DHP3446	DHP4046	DHP5046
	5' 0 1/2"					
	5' 0"	DHP3050	DHP3250	DHP3450	DHP4050	DHP5050
	5' 1 1/2"					
5' 1"	DHP3051	DHP3251	DHP3451	DHP4051	DHP5051	
5' 6 1/2"						
5' 6"	DHP3056	DHP3256	DHP3456	DHP4056	DHP5056	
6' 0 1/2"						
6' 0"	DHP3060	DHP3260	DHP3460	DHP4060	DHP5060	
6' 6 1/2"						
6' 6"	DHP3066	DHP3266	DHP3466	DHP4066	DHP5066	

NOTES

If glass is positioned within 18" of the finished floor, safety/tempered glass may be required. Local codes may differ. Verify tempered glass requirements with your local building code official.

Use structural mullions when necessary or required by code.

The light patterns illustrated apply to rectangular removable wood grilles, Modern Divided Lights, Classic Divided Lights, Deco 100, 150 and 400 and between-glass grilles. All removable wood grilles will be installed in the units unless otherwise specified.

For a metric conversion in millimeters, multiply dimensions in inches by 25.4.

FORMULA FOR COMBINATION WINDOWS

The overall frame dimension (both width and height) is equal to the sum of the individual unit frame dimensions plus mull dimension(s).

The overall rough opening (both width and height) is equal to the overall frame dimensions plus 1/4" on all sides.

Andersen® E-Series Double-Hung Sash-Set Transom Window Sizes

		1' 8 1/2"	2' 0 1/2"	2' 4 1/2"	2' 6 1/2"	2' 8 1/2"	3' 0 1/2"	3' 2 1/2"	3' 4 1/2"	3' 8 1/2"	4' 0 1/2"	5' 0 1/2"
		1' 8"	2' 0"	2' 4"	2' 6"	2' 8"	3' 0"	3' 2"	3' 4"	3' 8"	4' 0"	5' 0"
R.O. F.S.	1' 2"											
	1' 2"	DHT1812	DHT2012	DHT2412	DHT2612	DHT2812	DHT3012	DHT3212	DHT3412	DHT3812	DHT4012	DHT5012
	1' 4"											
	1' 4"	DHT1814	DHT2014	DHT2414	DHT2614	DHT2814	DHT3014	DHT3214	DHT3414	DHT3814	DHT4014	DHT5014
	1' 6"											
	1' 6"	DHT1816	DHT2016	DHT2416	DHT2616	DHT2816	DHT3016	DHT3216	DHT3416	DHT3816	DHT4016	DHT5016
	1' 8"											
	1' 8"	DHT1818	DHT2018	DHT2418	DHT2618	DHT2818	DHT3018	DHT3218	DHT3418	DHT3818	DHT4018	DHT5018
	2' 0"											
	2' 0"	DHT1820	DHT2020	DHT2420	DHT2620	DHT2820	DHT3020	DHT3220	DHT3420	DHT3820	DHT4020	DHT5020

ADDITIONAL CUSTOM SIZES ARE AVAILABLE. CONTACT YOUR LOCAL DEALER FOR MORE INFORMATION. DRAWINGS ARE NOT TO SCALE.

Andersen® E-Series Radius Single-Hung Window Sizes

	2'-0 1/2"	4'-0 1/2"	2'-4 1/2"	4'-8 1/2"	2'-6 1/2"	5'-0 1/2"
	2'-0"	4'-0"	2'-4"	4'-8"	2'-6"	5'-0"
	3'-0" RAD	6'-0" RAD	3'-0" RAD	6'-0" RAD	3'-0" RAD	6'-0" RAD
3'-0" 1/2"						
3'-0" 1/2"	RSHG2030	RSHG2030-2	RSHG2430	RSHG2430-2	RSHG2630	RSHG2630-2
3'-4 1/2"						
3'-4 1/2"	RSHG2034	RSHG2034-2	RSHG2434	RSHG2434-2	RSHG2634	RSHG2634-2
4'-0 1/2"						
4'-0 1/2"	RSHG2040	RSHG2040-2	RSHG2440	RSHG2440-2	RSHG2640	RSHG2640-2
4'-6 1/2"						
4'-6 1/2"	RSHG2046	RSHG2046-2	RSHG2446	RSHG2446-2	RSHG2646	RSHG2646-2
5'-0 1/2"						
5'-0 1/2"	RSHG2050	RSHG2050-2	RSHG2450	RSHG2450-2	RSHG2650	RSHG2650-2
5'-1 1/2"						
5'-1 1/2"	RSHG2051	RSHG2051-2	RSHG2451	RSHG2451-2	RSHG2651	RSHG2651-2
5'-6 1/2"						
5'-6 1/2"	RSHG2056	RSHG2056-2	RSHG2456	RSHG2456-2	RSHG2656	RSHG2656-2
6'-0 1/2"						
6'-0 1/2"	RSHG2060	RSHG2060-2	RSHG2460	RSHG2460-2	RSHG2660	RSHG2660-2

NOTES

Units may be ordered with sash lifts if desired. Units 3'0" and wider will use two sash lifts.

Bottom sash operates up and down and tilts inward for cleaning. Top sash is fixed.

If glass is positioned within 18" of the finished floor, safety/tempered glass may be required. Local codes may differ. Verify tempered glass requirements with your local building code official.

Use structural mullions when necessary or required by code.

The light patterns illustrated apply to rectangular removable wood grilles, Modern Divided Lights, Classic Divided Lights, Deco 100, 150 and 400 and between-glass grilles. All removable wood grilles will be installed in the units unless otherwise specified.















































For a metric conversion in millimeters, multiply dimensions in inches by 25.4.

FORMULA FOR COMBINATION WINDOWS

The overall frame dimension (both width and height) is equal to the sum of the individual unit frame dimensions plus mull dimension(s).

The overall rough opening (both width and height) is equal to the overall frame dimensions plus 1/4" on all sides.

Andersen® E-Series Radius Single-Hung Window Sizes

	2'-8 1/2"	5'-4 1/2"	3'-0 1/2"	6'-0 1/2"	3'-2 1/2"	6'-4 1/2"
	2'-8"	5'-4"	3'-0"	6'-0"	3'-2"	6'-4"
	3'-0" RAD	6'-0" RAD	3'-0" RAD	6'-0" RAD	3'-0" RAD	6'-0" RAD
3'-0 1/2"						
3'-0"	RSHG2830	RSHG2830-2	RSHG3030	RSHG3030-2	RSHG3230	
3'-4 1/2"						
3'-4"	RSHG2834	RSHG2834-2	RSHG3034	RSHG3034-2	RSHG3234	
4'-0 1/2"						
4'-0"	RSHG2840	RSHG2840-2	RSHG3040	RSHG3040-2	RSHG3240	RSHG3240-2
4'-6 1/2"						
4'-6"	RSHG2846	RSHG2846-2	RSHG3046	RSHG3046-2	RSHG3246	RSHG3246-2
5'-0 1/2"						
5'-0"	RSHG2850	RSHG2850-2	RSHG3050	RSHG3050-2	RSHG3250	RSHG3250-2
5'-1 1/2"						
5'-1"	RSHG2851	RSHG2851-2	RSHG3051	RSHG3051-2	RSHG3251	RSHG3251-2
5'-6 1/2"						
5'-6"	RSHG2856	RSHG2856-2	RSHG3056	RSHG3056-2	RSHG3256	RSHG3256
6'-0 1/2"						
6'-0"	RSHG2860	RSHG2860-2	RSHG3060	RSHG3060-2	RSHG3260	RSHG3260-2

NOTES

Units may be ordered with sash lifts if desired. Units 3'0" and wider will use two sash lifts.

Bottom sash operates up and down and tilts inward for cleaning. Top sash is fixed.

If glass is positioned within 18" of the finished floor, safety/tempered glass may be required. Local codes may differ. Verify tempered glass requirements with your local building code official.

Use structural mullions when necessary or required by code.

The light patterns illustrated apply to rectangular removable wood grilles, Modern Divided Lights, Classic Divided Lights, Deco 100, 150 and 400 and between-glass grilles. All removable wood grilles will be installed in the units unless otherwise specified.































For a metric conversion in millimeters, multiply dimensions in inches by 25.4.

FORMULA FOR COMBINATION WINDOWS

The overall frame dimension (both width and height) is equal to the sum of the individual unit frame dimensions plus mull dimension(s).

The overall rough opening (both width and height) is equal to the overall frame dimensions plus 1/4" on all sides.

Andersen® E-Series Radius Reversed Cottage Single-Hung Window Sizes

	2'-0 1/2"	4'-0 1/2"	2'-4 1/2"	4'-8 1/2"	2'-6 1/2"	5'-0 1/2"
	2'-0"	4'-0"	2'-4"	4'-8"	2'-6"	5'-0"
	3'-0" RAD	6'-0" RAD	3'-0" RAD	6'-0" RAD	3'-0" RAD	6'-0" RAD
4'-6 1/2" 4'-6"						
	RSHRC2046	RSHRC2046-2	RSHRC2446	RSHRC2446-2	RSHRC2646	RSHRC2646-2
5'-0 1/2" 5'-0"						
	RSHRC2050	RSHRC2050-2	RSHRC2450	RSHRC2450-2	RSHRC2650	RSHRC2650-2
5'-1 1/2" 5'-1"						
	RSHRC2051	RSHRC2051-2	RSHRC2451	RSHRC2451-2	RSHRC2651	RSHRC2651-2
5'-6 1/2" 5'-6"						
	RSHRC2056	RSHRC2056-2	RSHRC2456	RSHRC2456-2	RSHRC2656	RSHRC2656-2
6'-0 1/2" 6'-0"						
	RSHRC2060	RSHRC2060-2	RSHRC2460	RSHRC2460-2	RSHRC2660	RSHRC2660-2

NOTES

Units may be ordered with sash lifts if desired. Units 3'0" and wider will use two sash lifts.

Bottom sash operates up and down and tilts inward for cleaning. Top sash is fixed.

If glass is positioned within 18" of the finished floor, safety/tempered glass may be required. Local codes may differ. Verify tempered glass requirements with your local building code official.

Use structural mullions when necessary or required by code.

The light patterns illustrated apply to rectangular removable wood grilles, Modern Divided Lights, Classic Divided Lights, Deco 100, 150 and 400 and between-glass grilles. All removable wood grilles will be installed in the units unless otherwise specified.

For a metric conversion in millimeters, multiply dimensions in inches by 25.4.

FORMULA FOR COMBINATION WINDOWS

The overall frame dimension (both width and height) is equal to the sum of the individual unit frame dimensions plus mull dimension(s).

The overall rough opening (both width and height) is equal to the overall frame dimensions plus 1/4" on all sides.

Andersen® E-Series Radius Reversed Cottage Single-Hung Window Sizes

		2'-8 1/2"	5'-4 1/2"	3'-0 1/2"	6'-0 1/2"	3'-2 1/2"	6'-4 1/2"
		2'-8"	5'-4"	3'-0"	6'-0"	3'-2"	6'-4"
		3'-0" RAD	6'-0" RAD	3'-0" RAD	6'-0" RAD	3'-0" RAD	6'-0" RAD
R.O. F.S.	4'-6 1/2"						
	4'-6"	RSHRC2846	RSHRC2846-2	RSHRC3046	RSHRC3046-2	RSHRC3246	RSHRC3246-2
	5'-0 1/2"						
	5'-0"	RSHRC2850	RSHRC2850-2	RSHRC3050	RSHRC3050-2	RSHRC3250	RSHRC3250-2
	5'-1 1/2"						
5'-1"	RSHRC2851	RSHRC2851-2	RSHRC3051	RSHRC3051-2	RSHRC3251	RSHRC3251-2	
5'-6 1/2"							
5'-6"	RSHRC2856	RSHRC2856-2	RSHRC3056	RSHRC3056-2	RSHRC3256	RSHRC3256-2	
6'-0 1/2"							
6'-0"	RSHRC2860	RSHRC2860-2	RSHRC3060	RSHRC3060-2	RSHRC3260	RSHRC3260-2	

NOTES
Units may be ordered with sash lifts if desired. Units 3'0" and wider will use two sash lifts.

Bottom sash operates up and down and tilts inward for cleaning. Top sash is fixed.

If glass is positioned within 18" of the finished floor, safety/tempered glass may be required. Local codes may differ. Verify tempered glass requirements with your local building code official.

Use structural mullions when necessary or required by code.

The light patterns illustrated apply to rectangular removable wood grilles, Modern Divided Lights, Classic Divided Lights, Deco 100, 150 and 400 and between-glass grilles. All removable wood grilles will be installed in the units unless otherwise specified.

For a metric conversion in millimeters, multiply dimensions in inches by 25.4.

FORMULA FOR COMBINATION WINDOWS



















































The overall frame dimension (both width and height) is equal to the sum of the individual unit frame dimensions plus mull dimension(s).

The overall rough opening (both width and height) is equal to the overall frame dimensions plus 1/4" on all sides.

Andersen® E-Series Double-Hung Auxiliary Transom Window Sizes

		1' 8 1/2"	2' 0 1/2"	2' 4 1/2"	2' 6 1/2"	2' 8 1/2"	3' 0 1/2"	3' 2 1/2"	3' 4 1/2"	3' 8 1/2"	4' 0 1/2"	5' 0 1/2"
		1' 8"	2' 0"	2' 4"	2' 6"	2' 8"	3' 0"	3' 2"	3' 4"	3' 8"	4' 0"	5' 0"
R.O. F.S.	1'-2"											
	1'-4"	DAT1812	DAT2012	DAT2412	DAT2612	DAT2812	DAT3012	DAT3212	DAT3412	DAT3812	DAT4012	DAT5012
	1'-6"											
	1'-8"	DAT1814	DAT2014	DAT2414	DAT2614	DAT2814	DAT3014	DAT3214	DAT3414	DAT3814	DAT4014	DAT5014
	2'-0"											
2'-0 1/2"	DAT1816	DAT2016	DAT2416	DAT2616	DAT2816	DAT3016	DAT3216	DAT3416	DAT3816	DAT4016	DAT5016	
2'-0"												
2'-0 1/2"	DAT1818	DAT2018	DAT2418	DAT2618	DAT2818	DAT3018	DAT3218	DAT3418	DAT3818	DAT4018	DAT5018	
2'-0"												
2'-0 1/2"	DAT1820	DAT2020	DAT2420	DAT2620	DAT2820	DAT3020	DAT3220	DAT3420	DAT3820	DAT4020	DAT5020	

Andersen® E-Series Monumental Single-Hung Window Sizes

	1' 8 1/2"	2' 0 1/2"	2' 4 1/2"	2' 6 1/2"	2' 8 1/2"	3' 0 1/2"	3' 2 1/2"	3' 4 1/2"	3' 8 1/2"	4' 0 1/2"
	1' 8"	2' 0"	2' 4"	2' 6"	2' 8"	3' 0"	3' 2"	3' 4"	3' 8"	4' 0"
8' 0 1/2" 8' 0"										
	MSH1880	MSH2080	MSH2480	MSH2680	MSH2880	MSH3080 †	MSH3280 †	MSH3480 †	MSH3880 †	MSH4080 †
8' 6 1/2" 8' 6"										
	MSH1886	MSH2086	MSH2486	MSH2686	MSH2886	MSH3086 †	MSH3286 †	MSH3486 †	MSH3886 †	MSH4086 †
9' 0 1/2" 9' 0"										
	MSH1890	MSH2090	MSH2490	MSH2690	MSH2890	MSH3090 †	MSH3290 †	MSH3490 †	MSH3890 †	MSH4090 †
9' 6 1/2" 9' 6"										
	MSH1896	MSH2096	MSH2496	MSH2696	MSH2896	MSH3096 †	MSH3296 †	MSH3496 †	MSH3896 †	MSH4096 †
10' 0 1/2" 10' 0"										
	MSH18100	MSH20100	MSH24100	MSH26100	MSH28100	MSH30100 †	MSH32100 †	MSH34100 †	MSH38100 †	MSH40100 †

NOTES

† These units meet or exceed the following dimensions: Clear Opening Area 5.7 sq. ft., Clear Opening Width 20", Clear Opening Height 24" and 44" maximum floor to sill height (with standard 6'10-1/2" structural header height). See your local code official for requirements in your area.

Units may be ordered with sash lifts if desired. Units 3'0" and wider will use two sash lifts.

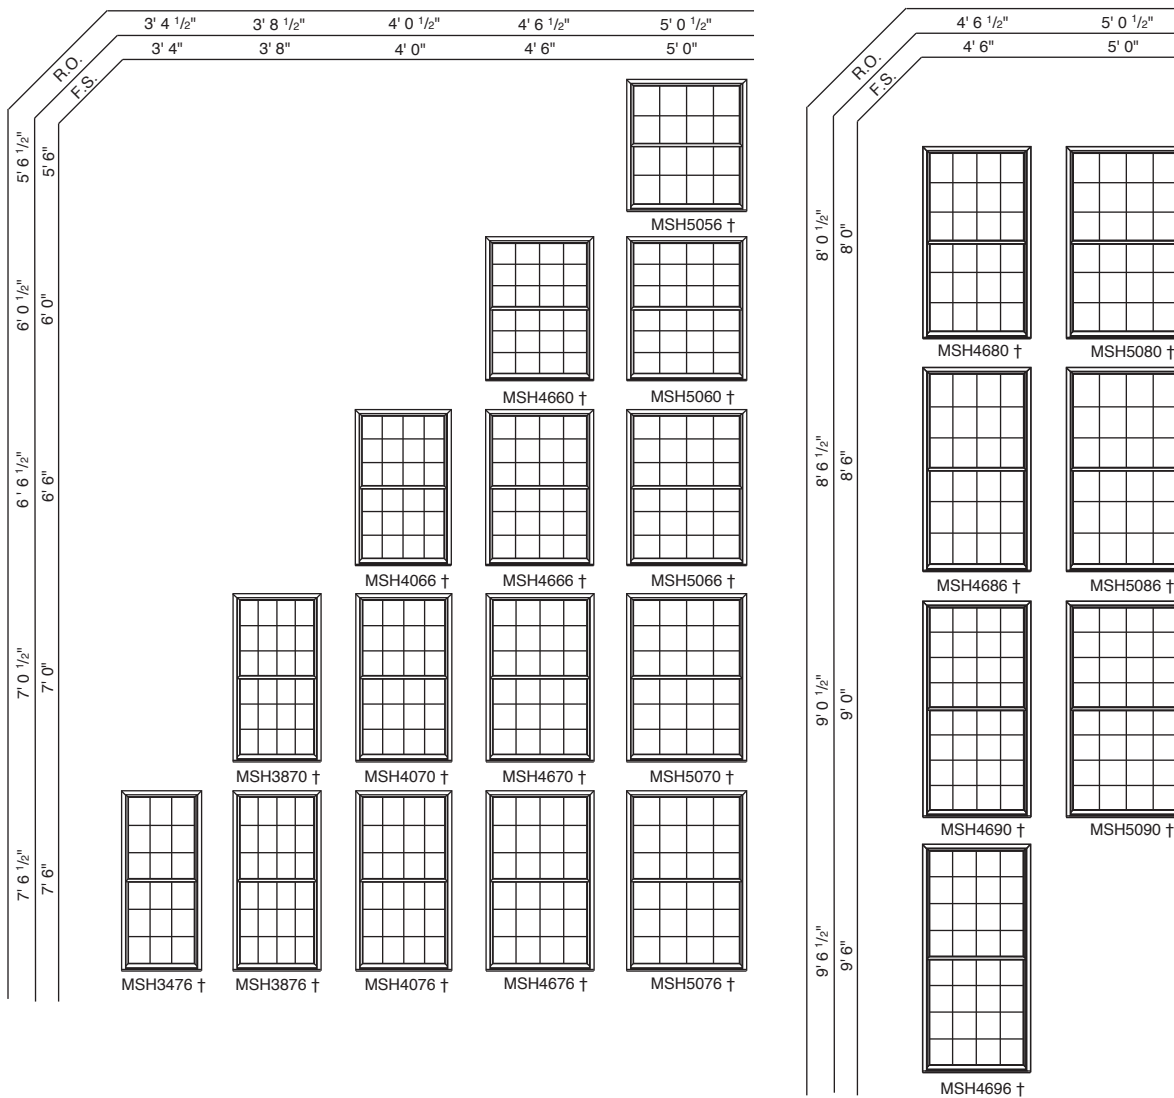
Bottom sash operates up and down, but does not tilt. Top sash is fixed.

Units equal to or greater than 8'0" tall are limited to 24" of clear opening height.

Sash Ratio: Standard units are equal light sash. However, Cottage and Reversed Cottage are available as an option with some limitations. Contact your local dealer for more information.

See notes on page 71 for more information.

Andersen® E-Series Monumental Single-Hung Window Sizes



NOTES

† These units meet or exceed the following dimensions: Clear Opening Area 5.7 sq. ft., Clear Opening Width 20", Clear Opening Height 24" and 44" maximum floor to sill height (with standard 6'10-1/2" structural header height). See your local code official for requirements in your area.

Units may be ordered with sash lifts if desired. Units 3'0" and wider will use two sash lifts.

Bottom sash operates up and down, but does not tilt. Top sash is fixed.

Units equal to or greater than 8'0" tall are limited to 24" of clear opening height.

Sash Ratio: Standard units are equal light sash. However, Cottage and Reversed Cottage are available as an option with some limitations. Contact your local dealer for more information.

If glass is positioned within 18" of the finished floor, safety/tempered glass may be required. Local codes may differ. Verify tempered glass requirements with your local building code official.

Use structural mullions when necessary or required by code.

The light patterns illustrated apply to rectangular removable wood grilles, Modern Divided Lights, Classic Divided Lights, Deco 100, 150 and 400 and between-glass grilles. All removable wood grilles will be installed in the units unless otherwise specified.

For a metric conversion in millimeters, multiply dimensions in inches by 25.4.

FORMULA FOR COMBINATION WINDOWS

The overall frame dimension (both width and height) is equal to the sum of the individual unit frame dimensions plus mull dimension(s).

The overall rough opening (both width and height) is equal to the overall frame dimensions plus 1/4" on all sides.