





STORM DOOR MEASURE GUIDE
4 EASY STEPS

For a measuring video or a digital copy of this guide, visit stormdoors.com/measure or scan the QR Code.




CHECK TO ENSURE DOOR OPENING AND TRIM ALLOW ENOUGH SPACE FOR A STORM DOOR

INTERIOR

DIMENSION A: Minimum 3/4" width flat trim surface required (Note: 75 Series and Forever® Storm Doors require a minimum of 1")

DIMENSION B: Minimum of 1" trim (brickmould) depth required

DIMENSION C: Minimum of 2 ½" door frame (jamb) depth required*



EXTERIOR

STEP 2


MEASURE THE DOOR OPENING

Measure the width of the door opening at the inside face of exterior trim on each side at top, center & bottom: (see measure points W1, W2 & W3)

RECORD THE SHORTEST WIDTH:	
	INCHES

Measure for height from the sill to the underside of the brickmould at the top of the door: (see measure point H)

RECORD THE HEIGHT:	
	INCHES

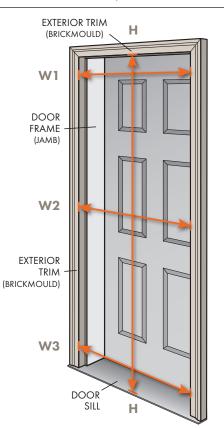

PROCEED TO STEP 3 ON BACK

^{*} Note: Depending on the depth and location of your entry door handle set, additional clearance may be needed.

DETERMINE THE SIZE YOU NEED BASED ON THE DOOR OPENING MEASURMENTS AND THE STORM DOOR MODEL THAT IS SELECTED

STANDARD DOOR SIZE WIDTH RANGES:	30"	32"	34"	36"
Andersen 4000 & 3000 Series Storm	29 7/8"	31 7/8"	33 7/8"	35 7/8"
Doors with 45 Minute Easy Install System	TO	TO	TO	TO
(from Step 2)	30 3/8"	32 3/8"	34 3/8"	36 3/8"
Andersen 2000 & 400 Series	29 3/4"	31 3/4"	33 3/4"	35 3/4"
and EMCO Storm Doors	TO	TO	TO	TO
(from Step 2)	30 3/8"	32 3/8"	34 3/8"	36 3/8"

STANDARD DOOR SIZE HEIGHT RANGES:	80"
All Doors (from Step 2)	80" TO 80 7/8"

IF YOUR MEASUREMENTS FROM STEP 2 FALL WITHIN THE STANDARD WIDTH & HEIGHT RANGES, RECORD YOUR DOOR SIZE HERE:

X

STANDARD WIDTH STANDARD HEIGHT (for example 36" X 80")

If your measurements are outside the standard width or height ranges shown above, you will require a custom size door.




Andersen Custom Door Opening WIDTHS:	CUSTOM 27 7/8" ⊺○ 38 3/8"	CUSTOM XL 27 7/8" TO 42"
Andersen Custom Door Opening HEIGHTS:	72" TO 847/8"	72" TO 96"
	custom	custom x
EMCO Custom Door Opening WIDTHS:	27 3/4" TO 38 3/8"	38 1/2" TO 42"
		•

^{*} Select storm door models and select options are not available in custom sizes.



CHOOSE THE HANDING THAT WORKS BEST WITH YOUR ENTRYWAY

If you choose an Andersen 4000 or 3000 Series Storm Door with the 45 Minute Easy Install System, handing will need to be specified at the time of purchase.



☐ Left Handed (LH)

☐ Right Handed (RH)

TEAR HERE